

Implementation of Underwater Acoustic Channel for UWASN

Ms. Jyotsna W. Chavhan¹ and Dr. G.G. Sarate²

¹Research Scholar, K. D. K. College of Engineering, Nagpur

²Professor & Supervisor Govt. Polytechnic, Amravati

E-mail: ¹jyotsna12.gawai@gmail.com, ²ggsanshu@gmail.com

Abstract—Underwater wireless communication is a rapidly growing area of research and engineering. Various scientists are exploring fundamental aspects of Underwater Acoustic Communication for various underwater applications like Oceanographic data collection, Pollution monitoring, offshore exploration, Disaster prevention, Assisted Navigation, Tactical Surveillance and Mine Reconnaissance. To achieve this objective, sensors and vehicles self-organize in an autonomous network, which can adapt to the characteristics of the ocean environment. The above described features enable a broad range of applications for underwater acoustic sensor networks. Acoustic communication transmission technology is used for this UWASN (Underwater Acoustic Sensor Network), but still due to the physical properties of the propagation medium, underwater acoustic signals suffer from severe transmission loss, time-varying multipath propagation, Doppler spread, limited and distance-dependent bandwidth, and high propagation delay. Also waves under the water is scattered and propagates very slow which produces the propagation delay in it. The scattering nature of underwater communication channel raised the problem of multipath fading, Doppler delay, Doppler shift and Doppler spread. The proposed system gives the maximum possible solution to all these issues using maximum entropy modeling method where, the channel is modeled based on the Gaussian distribution for the rapidly time-varying delay factor.

In this method the Doppler spread is identified between the transmitted signal and the received signal. Also, as the communication under the water gives scattering nature of transmission, the bit transmission rate and bit error rate are calculated based on channel transmission scheme using OFDM.

Keyword: Underwater Sensor Network, Acoustic Signal, Acoustic Channel, OFDM, Channel Estimation, Channel Modelling.

INTRODUCTION

Underwater Acoustic Sensor Networking is the emerging technology for various applications like oceanographic data collection, pollution monitoring, offshore exploration, disaster prevention, assisted navigation, tactical surveillance, and mine reconnaissance. etc. Underwater Acoustic Sensor Networks (UWASN) is designed to monitor the underwater data continuously with the help of sensors. The objective of this research is to explore fundamental key aspects of underwater acoustic communications, propose communication

architectures for UASNs, and develop efficient sensor communication protocols used for the underwater environment. In this proposed system, the underwater Acoustic Communication channel is model using maximum entropy modeling technique with its root mean square. Doppler spread is 0.5 - 2 Hz only. Here, the acoustic channel satisfy the smart antenna approach by using IEEE standard 802.15.4, which gives the data transmission rate up to 250 Kbps at 2.4 GHz carrier frequency for at least 2m vertical link and approximately 100 m horizontal link, by keeping the depth of water up to 1.5m. The system is tested in a 25m x 13m (i.e. 325 m²) swimming pool with 1m to 1.5m depth. Therefore, the acoustic channel is also estimated based on shallow water conditions. Since shallow water acoustic communication is consider. For this the bandwidth was kept up to 2.4GHz. This can generate the maximum signal-to-noise ratio (SNR) is up to 1.477 dB and its Bit Error-Rate (BER) is calculated as -14.9513 dB. As the signal gets scattered in to the water, therefore orthogonal frequency division multiplexing technique is implemented, which divide the carriers into equivalent sub-carriers. Here 16 to 64 sub-carriers at the frequency of 3.6 MHz are used and each sub-carrier are made to process 256 bits per sub-channel, therefore, maximum 4096 bps to 16384 bps can be actually transmitted with the help of sub-carriers. Based on this concept, the system is simulated for 20 numbers of nodes then, for simulating this network the maximum energy required is 0.4094 Joules. Based on above tested and simulated results, here we designed the smart underwater acoustic communication system with fast communication and less power consumption.

UNDERWATER ACOUSTIC CHANNEL ESTIMATION

Taking into account the physical models of acoustic propagation loss and ambient noise, the optimal frequency allocation for communication signals can be calculated. Considering optimal signal energy allocation, such frequency band is defined so that the channel capacity is maximized [5]. The results that are assessed suggest that, despite the fact that frequency spectrum [6][8] for underwater acoustic communications, the possibilities in terms of usable frequency

bands are not numerous, due to acoustic path propagation and noise characteristics.

SNR and SER

The narrow-band signal to noise ratio (SNR) observed at a receiver over a distance L m when the transmitted signal is a tone of frequency f and power P is given by:

$$SNR(l, f) = \frac{p(F)}{Nf \Delta f A(L, F)}$$

where Δf is a narrow band around the frequency f, and $S(f)$ is the power spectral density of the transmitted communication signal. Directivity indices and losses other than the path loss are not counted. The AN product, $A(l, f)N(f)$, determines the frequency-dependent part of the SNR. The inverse of the AN product is illustrated in Figure 2.1.

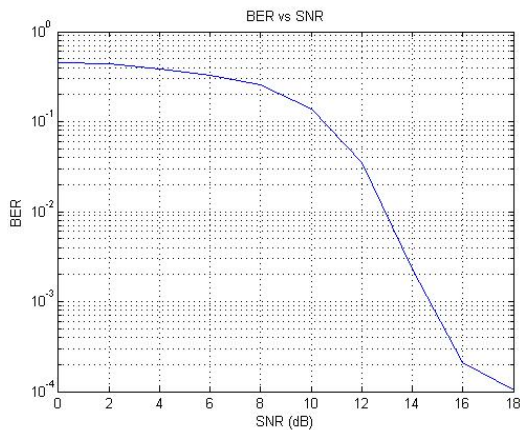


Figure 2.1: Simulation results of SNR with BER

OPTIMAL FREQUENCY

Observing the inverse of the AN product, $1/A(l, f)N(f)$ in Figure 2.2, it can be concluded that for each distance, there exists an optimal frequency $f_0(l)$ for which the maximal narrow-band SNR is obtained at the receiver. The optimal frequency is plotted as a function of transmitter receiver distance. When implementing a communication system, some transmission bandwidth around $f_0(l)$ is chosen. The transmission power is adjusted so as to achieve the desired SNR level throughout the selected frequency band. Practically, the response of the transducers and hydrophones must be taken into account and the optimal transmission frequency may vary.

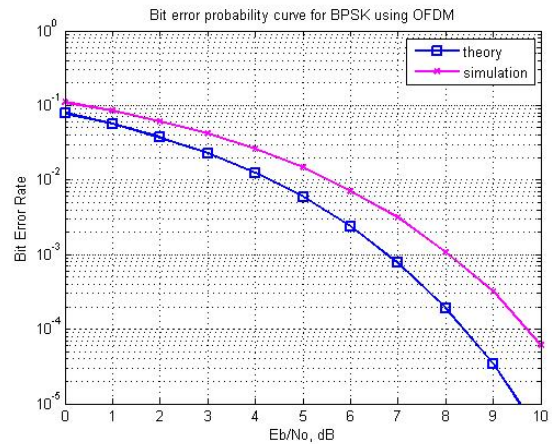


Figure 2.2: Simulation results BER with AN Product.

CHANNEL ESTIMATION

Xbee systems are based on the IEEE 802.15.4 standard. The physical interface is based on OFDMA, which is a multiuser multicarrier modulation technique, in which the different sub-carriers of each symbol may be shared between several users. The bandwidth can be scaled from 1.1 MHz (corresponding to 64 sub-carriers) to 3.6 GHz (corresponding to 64 subcarriers), leading to significant flexibility in system design. The bandwidth of each sub-carrier is 25.6 MHz in all configurations leading to a constant OFDM symbol duration of 3.2 μ s, not including the cyclic prefix. Several coding and modulation schemes are contained in the standard.

There are seven mandatory schemes including modulations from QPSK to 64 QAM and convolution coding with rates 1/2, 2/3 and 3/4. The spectral efficiency can then be varied from one information bit per symbol to 4.5 information bits per symbol and hence enabling systems to adapt to varying received SNRs.

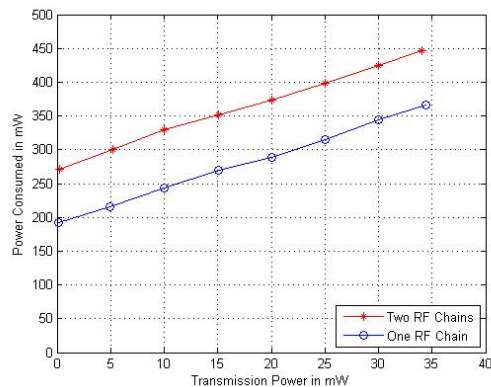


Figure 2.3: Simulation results of Transmission Power with Power Consumption

Multiple antenna techniques further enhance the performance of the technology. There are mainly two MIMO techniques included in the standard. In order to estimate the underwater acoustic channel using OFDM approach. The channel is subdivided into 64 sub-carriers through which the data can be transmitted with 25.6MHz bandwidth of each sub-carrier. Each sub-carrier is having is used to transmit 256 bits at a time. The OFDM symbol duration is 3.2μs and it generate the Doppler spread up to 0.5-2Hz with delay spread is 1ms. The proper guard intervals are inserted to avoid the Interference in between the sub-carriers as shown in figure 6.5. The underwater system performance can be tested based on the three different algorithms, like Rayleigh fading channel, MSE of the channel estimator and BER performance.

All the three has used and been tested using their simulation environment. The channel model used in this work is a basic Rayleigh fading channel with additive white Gaussian noise, which is commonly used in analysis of radio communication systems as shown in figure 2.4 (b). The simulated MSE of the channel estimator as function of the Doppler spread is shown for 16 and 64 sub-carriers, respectively. The curves corresponding to a normalized Doppler spread of 0.01 shows little degradation compared to the case of no Doppler spread, while the curves corresponding to a normalized Doppler spread of 0.1 exhibits an errorous that starts to appear at Eb / N0 below 10 dB, which is lower than the operating point for most of the system configurations.

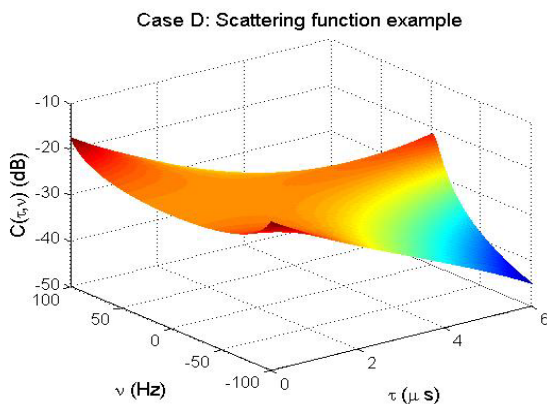


Figure 2.4: Channel Estimation using Scattering Function

Simulated BER with 1/2-rate convolution coding, QPSK modulation and single transmit and receive antennas is shown in Figure 2.6. The scheme corresponds to mode 1 coding in the IEEE 802.15.4 standard. The curves indicate that the estimation error starts to become critical for Doppler spread around 0.5 - 2 Hz (corresponding to normalized Doppler spread around 0.05 and 0.1) and delay spread around 1 ms (corresponding to normalized delay spread in the order of 0.01). To obtain BERs in the order of 10⁻⁵ and delay spread should be lower than shown in the figures 2.6.

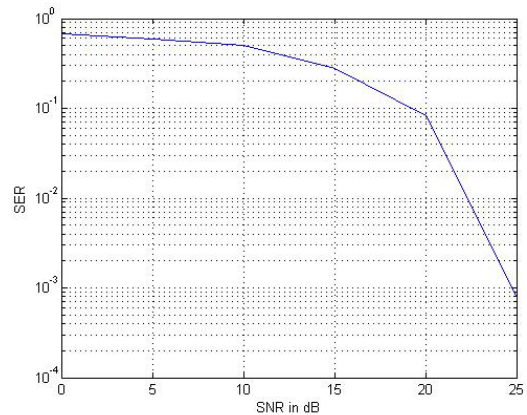


Figure 2.6: Simulated BER with 1/2-rate convolution coding

CONCLUSION

Research on underwater communications and the use of Underwater Sensor Networks is becoming a very hot topic because of the appearance of new marine/oceanographic applications. As a consequence, other available underwater acoustic technology can support mostly point-to-point, low-data-rate, delay-tolerant applications. Some of the shown experimental results for point-to-point acoustic modems use signaling schemes that can achieve data rates lower than 20 kbit/s with a link distance of 1 km over horizontal links. Whereas in the proposed system, where Communications is based on RF signal transmission offers great benefits such as, increase of the data rate of the link to transmit more information.

The underwater acoustic communication channel is model using Maximum Entropy modeling technique for Acoustic channel simulation with its root mean square. Doppler spread is 0.5 to 2 Hz. The Acoustic communication channel satisfy smart antenna approach by using IEEE standard 802.15.4 which gives the data transmission rate up to 250 Kbps at 2.4 GHZ carrier frequency for at least 2m vertical communication link and approximately 2m horizontal link by keeping the depth of water up to 1m, Since shallow water acoustic communication is consider. For this, the bandwidth was kept up to 2.4 GHZ. The system can generate the maximum signal-to-noise ratio (SNR) is up to 1.477 dB and its Signal-Error-Rate (SER) is calculated as -14.9513 dB.

As the signal gets scattered in to the water, therefore orthogonal frequency division multiplexing technique is implemented, which divide the carriers into equivalent sub-carriers. Here 16 to 64 sub-carriers at the frequency of 3.6 MHz and each sub-carrier are made to process 256 bits per sub-channel; therefore, maximum 4096 bps to 16384 bps can be actually transmitted with the help of each sub-carrier. Based on this concept, the system is simulated for 25 numbers of nodes. For simulating this network the maximum energy required is 0.4094 Joules.

Thus, the smart underwater acoustic communication system is designed with fast communication and less power consumption.

ACKNOWLEDGMENT

I would like to thank all the authors whose papers are reviewed and refer for the work and to all the anonymous reviewers for their very useful and constructive comments. Also would like to thank my supervisor for their constructive criticism and progressive help towards this work.

REFERENCES

- [1] Ms. Jyotsna W. Chavhan, Department of Electronics Engineering, K.D.K., Dr. G. G. Sarate, Senior Lecturer, Govt. Polytechnic, Amravati (MS), India, "Smart Antenna Approach in Underwater Acoustic Sensor Network using OFDM: A Review", Published in: Green Computing, Communication and Conservation of Energy (ICGCE), 2013 International Conference 2014 Dec. 2013, 155 – 158 INSPEC Accession Number: 14335715 DOI: 10.1109/ICGCE.2013.6823419 by IEEE Explorer.
- [2] Ms. Jyotsna W. Chavhan, Department of Electronics Engineering, K.D.K. Polytechnic, Amravati (MS), India, "Scattering Function Estimation for Underwater Acoustic Sensor Network", Published in International Journal of Industrial Electronics and Electrical Engineering (IJIEEE), ISSN: 2347-6982, June 2015, pp 90-92.
- [3] Abraham Boayue, "Characterization of Underwater Acoustic Communication Channels, Statistical Characteristics of the Underwater", Master of Science in Communication Technology, Norwegian University of Science and Technology, Department of Electronics and Telecommunications, 26th August 2013
- [4] Francis-Xavier Socheleau, *Student Member, IEEE*, Christophe Laot, *Member, IEEE*, and Jean-Michel Passerieux., "Concise Derivation of Scattering Function from Channel Entropy Maximization, Draft, 30th April'2010
- [5] Arjun Thottappilly, "OFDM for Underwater Acoustic Communication", Master of Science in Electrical Engineering, Blacksburg, Virginia, 17th August' 2011.
- [6] Roald Otne, Paul van Walree, Trond Jensrud Norwegian Defence Research Establishment (FFI), PO box 115, 3191 Horten, Norway, "Validation Methods for Underwater Acoustic Communication Channel Simulators".
- [7] Y. Yorozu, M. Hirano, K. Oka, and Y. Tagawa, "Electron spectroscopy studies on magneto-optical media and plastic substrate interface," IEEE Transl. J. Magn. Japan, vol. 2, pp. 740-741, August 1987 [Digests 9th Annual Conf. Magnetism Japan, p. 301, 1982].
- [8] M. Young, The Technical Writer's Handbook. Mill Valley, CA: University Science, 1989.
- [9] Knut Grythe, Jan Erik Hakegard at IEEE Journal-2009, Non-perfect Channel Estimation in OFDM-MIMO based Underwater Communication.
- [10] Lance Linton, Phillip Conder, and Michael Faulkner, Center for Telecommunications and Micro-Electronics (CTME), Victoria University, Melbourne, Australia, "Multiuser Communications for underwater Acoustic Networks using MIMO-OFDM-IDMA.
- [11] Michael J. O'Rourke. Simulating Underwater Sensor Networks and Routing Algorithms in MATLAB" MASTER OF SCIENCE School of Engineering and Computer Science Engineering Science University of the Pacific Stockton, California 2013.
- [12] "Advances in Underwater Acoustic Networking", Tommaso Melodia, Hovannes Kulhandjian, Li-Chung Kuo, and Emre Can Demirors, State University of New York at Buffalo.
- [13] "Implementation of an OFDM based Underwater Acoustic Modem" ,Emre Can Demirors, A MS Thesis submitted to the Department of Electrical and Electronics Engineering and the graduate school of Engineering and Science of Bilkent University, August 2011.
- [14] Efficient Communication Protocols for Underwater Acoustic Sensor Networks: A Ph.D Thesis our Dario Pompili of Georgia Institute of Technology, August 2007.
- [15] Concise Derivation of Scattering Function from Channel Entropy Maximization, Francis-Xavier cheleau, *Student Member, IEEE*, Christophe Laot, *Member, IEEE*, and Jean-Michel Passerieux.
- [16] Characterization of Underwater Acoustic Communication Channels Statistical Characteristics of the Underwater Multipath Channels by Abraham Boayue, Master of Science in Communication, Norwegian University of Science and Technology, Department of Electronics and Telecommunications, August 26, 2013.
- [17] A. E. Abdelkareem, B. S. Sharif, C. C. Tsimenidis and J.A. Neasham, "Time varying Doppler-shift compensation for OFDM-based shallow Underwater Acoustic Communication systems", at Eighth IEEE International Conference on Mobile Ad-Hoc and Sensor Systems, 2011, pg no. 885 -891.